

Particular Features

Simple and economic fastener for lids, etc.



Easy installation by blind riveting.

¼ Turn to lock

Secure locking on detent.

Dimensions	Materials / Finish	°C	Part No.
	<p>Steel / zinc-plated, CrVI-free, clear passivation</p>	<p>100</p>	<p>52E02-*-1AG</p>

Selection and Installation Instructions

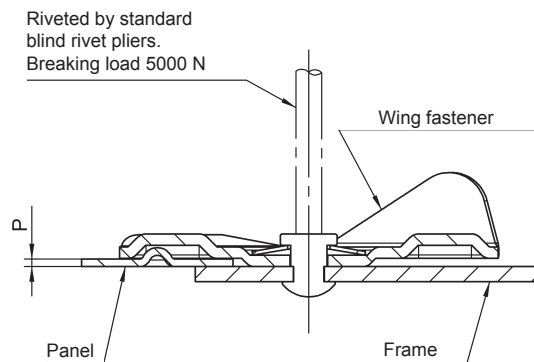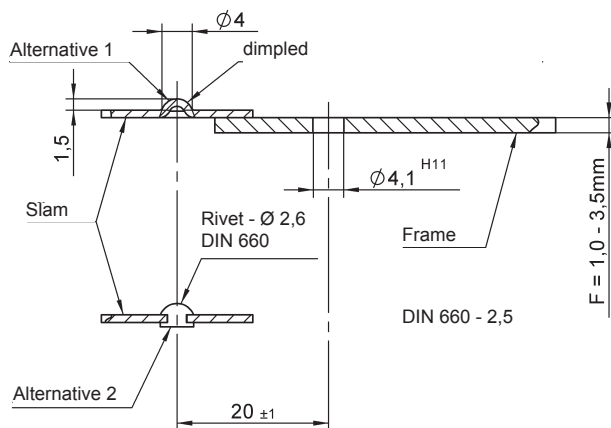

Part No.	Panel Thickness P	Height H
52E02-01-1AG	0 (flush)	0,7
52E02-02-1AG	1	1,1
52E02-03-1AG	2	1,7