



## Features

- Wide grip range (total thickness G up to 15 mm).
- Suitable for a large range of applications.
- Easy installation with single-hole mounting.
- Either tool-operated (slotted recess head) or hand-operated (fixed wing head).
- Clockwise locking 3/4 turn maximum.

## Part no. example

Pawl Latches, slotted recess head, with decorative washer.

## V964L 01 -1 -2AG

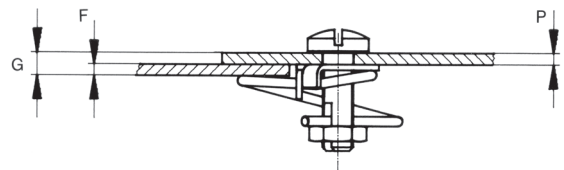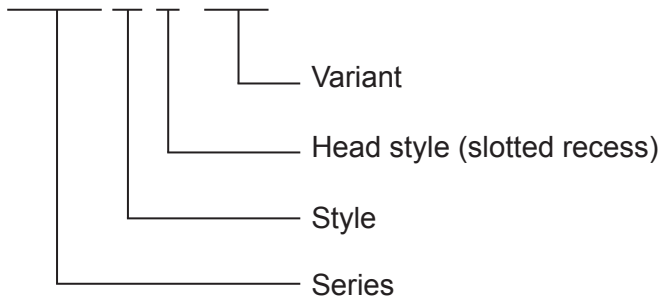

$$G = P + F \text{ (see page B-2)}$$

Style	Dimensions	Materials / Finish	°C	Part No.
<b>Slotted Recess Head</b> 		Stud: Steel / zinc-plated CrVI-free, clear passivation  Spring: Stainless steel	120	<b>V964L01-1-1AG</b>
<b>Slotted Recess Head with Decorative Washer</b> 		Stud: Steel / zinc-plated CrVI-free, clear passivation  Spring: Stainless steel	120	<b>V964L01-1-2AG</b>
<b>Fixed Wing Handle Plastic</b> 		Stud: Steel / zinc-plated CrVI-free, clear passivation  Spring: Stainless steel  Wing: Plastic (POM) black	-40 up to +100	<b>V964L01-2-1AG</b>

## Installation Dimensions

